




EX Series (280 pos.)

MKT-E-11018F

0.8 mm Pitch, Connectors for Medical and Industrial Applications

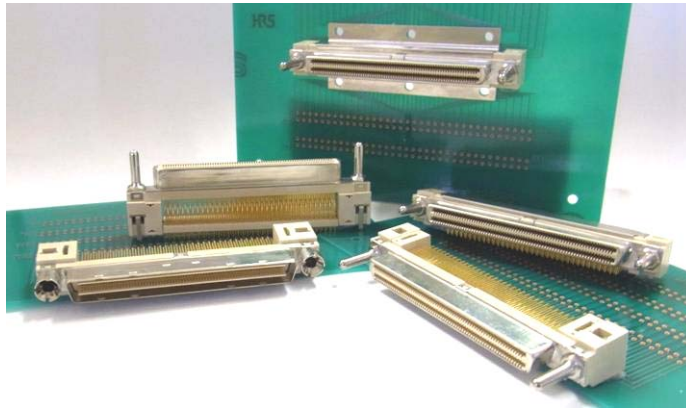

◆ Features

1. Optimum for portable ultrasound scanning interface
2. High pin count, yet small size and light weight
3. Enhanced grounding structure
4. 4-step displaced contact point for lower insertion force with high-pin-count
5. Floating locator improves mounting efficiency.
6. Wide variations: Straight & right angle receptacles, w/ or w/o shield
7. RoHS compliant, Halogen-free product*

*This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 maximum bromine, and 1500 ppm maximum total of chlorine and bromine.

◆ Small Size and Light Weight




[Plug on Probe Side]

[Receptacle on Device Side]

Right Angle

Right Angle

Straight

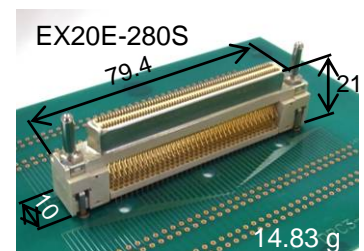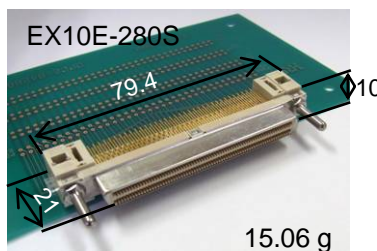
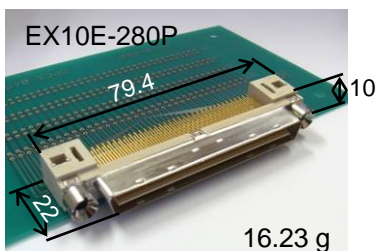


[Guides] Attachable with screwdrivers

Shielded Type

Guide Socket
Flathead / Cross Slot
Screwdriver

Guide Pole
Nut Screwdriver

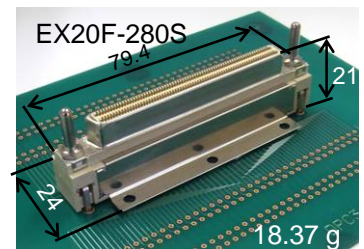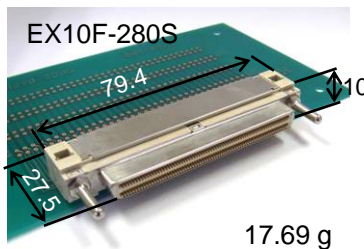

EX-SG

EX-PG

M3 screws are not included.

Guides are switchable between plug and receptacle by customers. At Hirose, we recommend attaching guide sockets to probe side and guide poles to device side.

*Dimensions are in millimeters

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.