




TF11 Series

0.4mm Pitch, 0.65mm Height, Single Sided Lead Bottom Contact, Back Flip(Front Access Type), FPC Connector

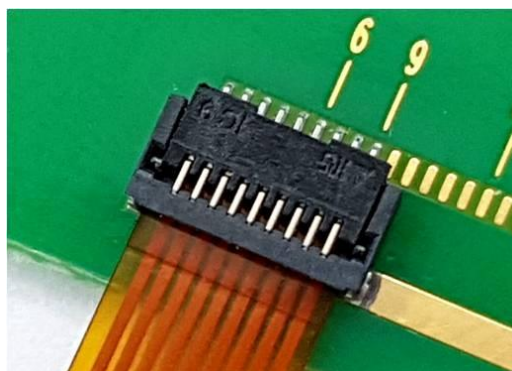


Super Low Profile
0.65mm

◆ Features

1. Space saving
 - 0.4mm Pitch, 3.0mm Mounting Depth, 0.65mm Height
2. Back flip design (Front Access Type)
 - Actuator is closed when mounted on board to prevent damage during delivery
3. High reliability
 - High FPC retention force with FPC side catcher design
 - Solder wicking and flux penetration prevention design
4. Environment compliance
 - RoHS compliant, Halogen-free product*1

*1 This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of chlorine and bromine.

◆ Dimensions (9 pos.)

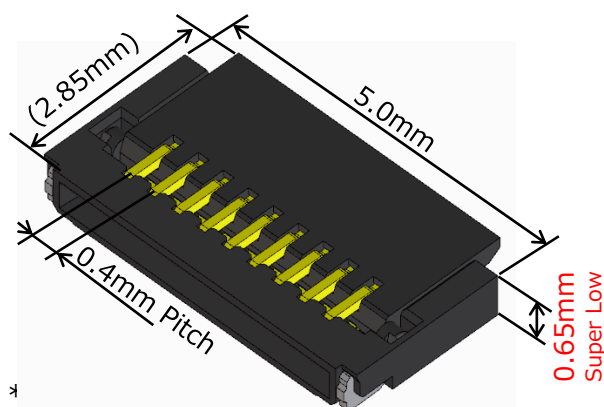

◆ Specifications


Contact Resistance*2	100mΩ Max.
Withstanding Voltage	150V AC for 1minute
Insulation Resistance	500MΩ Min. (DC 100V)
Rated Current	0.5A
Rated Voltage	50V AC/DC
FPC Thickness	0.12±0.02mm

*2 FPC resistance is included.

◆ Back Flip Design (Front Access Type)


Actuator is closed and mounted on board during delivery to prevent damage.

Conventional Back Flip connector TF11 Series (Front Access Type)

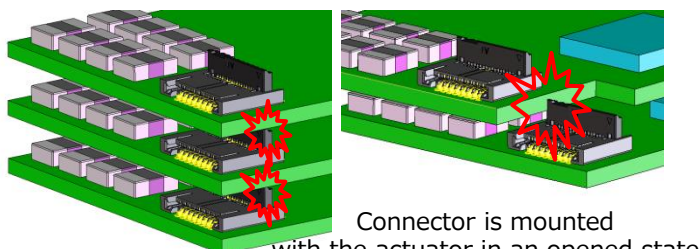

Connector is mounted with the actuator in an opened state

⇒ **Actuator might be damaged**

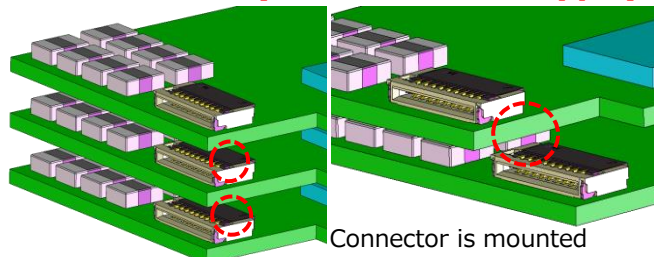

Connector is mounted with the actuator in a closed state

⇒ **Prevents actuator damage**

*Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

Apr.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.